

EEE4001F: Digital Signal Processing

Class Test 2

21 April 2011

Name:


Student number:

Information

- The test is closed-book.
 - This test has *four* questions, totalling 20 marks.
 - Answer *all* the questions.
 - You have 45 minutes.
-

1. (5 marks) Determine the 8-point DFT of the real-valued sequence $x[n] = \delta[n - 3]$. Plot the magnitude and phase of your answer on separate axes, ensuring that the phase lies between $-\pi$ and π .

2. (5 marks) Consider the system below

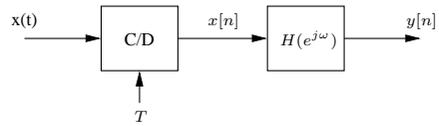

where $T = 0.001$ s and


$$H(e^{j\omega}) = \begin{cases} 1 & |\omega| \leq 0.5\pi \\ 0 & \text{otherwise} \end{cases}$$

for $-\pi \leq \omega \leq \pi$. Find the output $y[n]$ if the input is $x(t) = \cos(400\pi t) + \cos(600\pi t)$.

3. (5 marks) Find $w[n] = x[n] * y[n]$ with

$$x[n] = e^{j\pi n/3} \quad \text{and} \quad y[n] = \frac{\sin(\pi(n-5)/2)}{\pi(n-5)}.$$


4. (5 marks) Two students want to analyse a signal from a microphone. They digitise a sample of 128 points, obtaining the signal below:

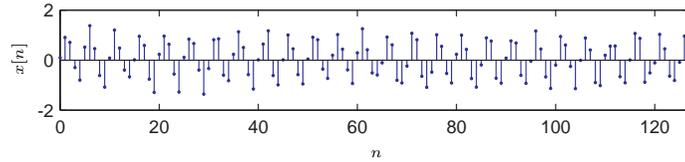

They decide to investigate the apparent periodicity by looking at the signal in the frequency domain. To do this they calculate the DFT

$$X[k] = \sum_{n=0}^{127} x[n] e^{-j \frac{2\pi}{128} kn}$$

for $k = 0, \dots, 127$, which has the following magnitude plot:

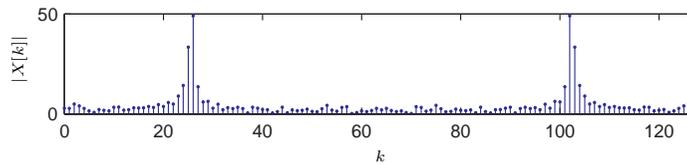

- What is the dominant frequency present in the signal, measured in radians per sample?
- The quantity $|X[k]|$ as calculated is a poor estimate of the spectrum of the microphone signal. Why is this so? What can be done to improve the estimate?

Fourier transform properties

Sequences $x[n], y[n]$	Transforms $X(e^{j\omega}), Y(e^{j\omega})$	Property
$ax[n] + by[n]$	$aX(e^{j\omega}) + bY(e^{j\omega})$	Linearity
$x[n - n_d]$	$e^{-j\omega n_d} X(e^{j\omega})$	Time shift
$e^{j\omega_0 n} x[n]$	$X(e^{j(\omega - \omega_0)})$	Frequency shift
$x[-n]$	$X(e^{-j\omega})$	Time reversal
$nx[n]$	$j \frac{dX(e^{j\omega})}{d\omega}$	Frequency diff.
$x[n] * y[n]$	$X(e^{-j\omega}) Y(e^{-j\omega})$	Convolution
$x[n]y[n]$	$\frac{1}{2\pi} \int_{-\pi}^{\pi} X(e^{j\theta}) Y(e^{j(\omega - \theta)}) d\theta$	Modulation

Common Fourier transform pairs

Sequence	Fourier transform
$\delta[n]$	1
$\delta[n - n_0]$	$e^{-j\omega n_0}$
1 ($-\infty < n < \infty$)	$\sum_{k=-\infty}^{\infty} 2\pi \delta(\omega + 2\pi k)$
$a^n u[n]$ ($ a < 1$)	$\frac{1}{1 - ae^{-j\omega}}$
$u[n]$	$\frac{1}{1 - e^{-j\omega}} + \sum_{k=-\infty}^{\infty} \pi \delta(\omega + 2\pi k)$
$(n + 1)a^n u[n]$ ($ a < 1$)	$\frac{1}{(1 - ae^{-j\omega})^2}$
$\frac{\sin(\omega_c n)}{\pi n}$	$X(e^{j\omega}) = \begin{cases} 1 & \omega < \omega_c \\ 0 & \omega_c < \omega \leq \pi \end{cases}$
$x[n] = \begin{cases} 1 & 0 \leq n \leq M \\ 0 & \text{otherwise} \end{cases}$	$\frac{\sin[\omega(M+1)/2]}{\sin(\omega/2)} e^{-j\omega M/2}$
$e^{j\omega_0 n}$	$\sum_{k=-\infty}^{\infty} 2\pi \delta(\omega - \omega_0 + 2\pi k)$

Common z-transform pairs

Sequence	Transform	ROC
$\delta[n]$	1	All z
$u[n]$	$\frac{1}{1 - z^{-1}}$	$ z > 1$
$-u[-n - 1]$	$\frac{1}{1 - z^{-1}}$	$ z < 1$
$\delta[n - m]$	z^{-m}	All z except 0 or ∞
$a^n u[n]$	$\frac{1}{1 - az^{-1}}$	$ z > a $
$-a^n u[-n - 1]$	$\frac{1}{1 - az^{-1}}$	$ z < a $
$na^n u[n]$	$\frac{az^{-1}}{(1 - az^{-1})^2}$	$ z > a $
$-na^n u[-n - 1]$	$\frac{az^{-1}}{(1 - az^{-1})^2}$	$ z < a $
$\begin{cases} a^n & 0 \leq n \leq N - 1, \\ 0 & \text{otherwise} \end{cases}$	$\frac{1 - a^N z^{-N}}{1 - az^{-1}}$	$ z > 0$
$\cos(\omega_0 n) u[n]$	$\frac{1 - \cos(\omega_0)z^{-1}}{1 - 2\cos(\omega_0)z^{-1} + z^{-2}}$	$ z > 1$
$r^n \cos(\omega_0 n) u[n]$	$\frac{1 - r \cos(\omega_0)z^{-1}}{1 - 2r \cos(\omega_0)z^{-1} + r^2 z^{-2}}$	$ z > r$