

# EEE4001F: Digital Signal Processing

Class Test 1

22 March 2007

## SOLUTIONS

---

**Name:**

**Student number:**

---

### Information

- The test is closed-book.
  - This test has *four* questions, totalling 20 marks.
  - Answer *all* the questions.
  - You have 45 minutes.
-

1. (5 marks) Determine the impulse response of the LTI system described by the difference equation

$$y[n] - 0.2y[n - 1] = x[n] + 0.5x[n - 1]$$

under the assumption that it is causal. Is the system stable?

The z-transform of the difference equation is

$$Y(z)(1 - 0.2z^{-1}) = X(z)(1 + 0.5z^{-1})$$

so

$$H(z) = \frac{Y(z)}{X(z)} = \frac{1 + 0.5z^{-1}}{1 - 0.2z^{-1}} = \frac{z + 0.5}{z - 0.2}$$

and the system has a pole at  $z = 0.2$ . The ROC for a causal system will be outside this pole:  $|z| > 0.2$ . This ROC includes the unit circle, so  $h[n]$  has a Fourier transform, is absolutely summable, and therefore corresponds to a stable system.


2. (5 marks) Which of the impulse responses

$$h_1[n] = 3\delta[n - 2] + \delta[n - 4]$$

$$h_2[n] = u[n - 3] - u[n + 5]$$

describe causal, stable, LTI processors? Give reasons for your answers. Sketch the step response of each system.

The impulse responses are



Since  $h_1[n] = 0$  for  $n < 0$ , it is the impulse response of a causal system. The system described by  $h_2[n]$  is not causal: the output when the input is a unit impulse at the origin starts at  $n = -5$ .

Both systems are stable, since their impulse responses are absolutely summable:


$$S_1 = \sum_{n=-\infty}^{\infty} |h_1[n]| = 4 \quad \text{and} \quad S_2 = \sum_{n=-\infty}^{\infty} |h_2[n]| = 8.$$

Thus both systems are stable.

The step response is the convolution of the impulse response with the unit step:

$$y[n] = \sum_{k=-\infty}^{\infty} h[k]u[n - k] = \sum_{k=-\infty}^n h[k]u[n - k] = \sum_{k=-\infty}^n h[k],$$

which is just the accumulated signal. Thus the respective step responses are

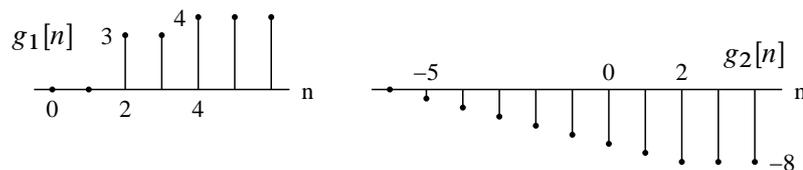

3. (5 marks) Convolve the signals

$$x_1[n] = \delta[n] - \delta[n - 2] + \delta[n - 3] \quad \text{and} \quad x_2[n] = 2\delta[n - 1] + \delta[n - 2] - \delta[n - 3]$$

using the z-transform.

The signals in the z-domain are  $X_1(z) = 1 - z^{-2} + z^{-3}$  and  $X_2(z) = 2z^{-1} + z^{-2} - z^{-3}$ .


The convolution is the product

$$\begin{aligned} Y(z) &= X_1(z)X_2(z) = [1 - z^{-2} + z^{-3}][2z^{-1} + z^{-2} - z^{-3}] \\ &= 2z^{-1} + z^{-2} - 3z^{-3} + z^{-4} + 2z^{-5} - z^{-6}, \end{aligned}$$


which inverts to

$$y[n] = 2\delta[n - 1] + \delta[n - 2] - 3\delta[n - 3] + \delta[n - 4] + 2\delta[n - 5] - \delta[n - 6].$$

4. (5 marks) Suppose  $y[n]$  is the output of an LTI system when  $x[n]$  is the input:

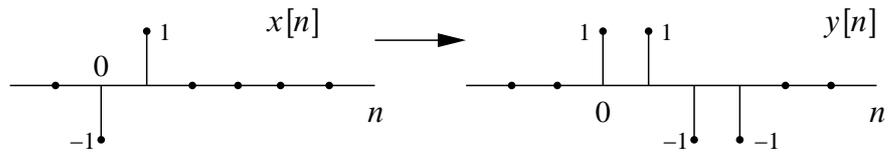

Find the response of the system to the input

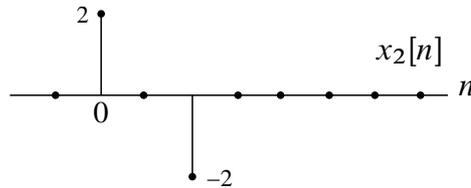

The response to  $x[n]$  is  $y[n]$ . Since the system is LTI, the response to  $2x[n]$  is  $2y[n]$  and the response to  $-2x[n-1]$  is  $-2y[n-1]$ . But observe that the signal  $x_2[n]$  is just  $2x[n] - 2x[n-1]$ , so the output must be the sum  $2y[n] - 2y[n-1]$ .