

# **EEE4001F: Digital Signal Processing**

## **Class Test 2**

**30 April 2008**

**Name:**

**Student number:**

---

### **Information**

- The test is closed-book.
  - This test has *four* questions, totalling 20 marks.
  - Answer *all* the questions.
  - You have 45 minutes.
-

1. (5 marks) Find  $w[n] = x[n] * y[n]$  with


$$x[n] = (-1)^n \quad \text{and} \quad y[n] = \frac{\sin(\pi n/3)}{\pi n}.$$

2. (5 marks) Consider the following discrete-time signal:

$$x[n] = \begin{cases} \sin\left(\frac{n\pi}{4}\right) & \text{when } n/2 \text{ is an integer} \\ 0 & \text{otherwise.} \end{cases}$$

Calculate and sketch the 8-point DFT (magnitude and phase) of the first 8 samples of  $x[n]$ , i.e.  $x[0], x[1], \dots, x[7]$ . Show and motivate your calculations.

3. (5 marks) Consider the following LTI system:

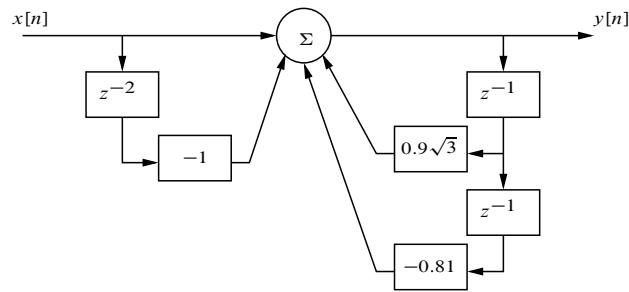

(a) Show that the system function is

$$H(z) = \frac{(z - 1)(z + 1)}{(z - 0.9e^{j\pi/6})(z - 0.9e^{-j\pi/6})}.$$

(b) Sketch the magnitude frequency response  $|H(e^{j\omega})|$  over the range  $0 \leq \omega \leq 2\pi$ . Indicate calculated amplitudes at  $\omega = 0$ ,  $\omega = \frac{\pi}{6}$ , and  $\omega = \pi$ .

4. (5 marks) One of the simplest filters is a backward-difference system, where

$$y[n] = x[n] - x[n - 1].$$

Using sketches, notes, and equations, justify why this is a highpass filter.

## Fourier transform properties

Sequences $x[n], y[n]$	Transforms $X(e^{j\omega}), Y(e^{j\omega})$	Property
$ax[n] + by[n]$	$aX(e^{j\omega}) + bY(e^{j\omega})$	Linearity
$x[n - n_d]$	$e^{-j\omega n_d} X(e^{j\omega})$	Time shift
$e^{j\omega_0 n} x[n]$	$X(e^{j(\omega - \omega_0)})$	Frequency shift
$x[-n]$	$X(e^{-j\omega})$	Time reversal
$nx[n]$	$j \frac{dX(e^{j\omega})}{d\omega}$	Frequency diff.
$x[n] * y[n]$	$X(e^{-j\omega})Y(e^{-j\omega})$	Convolution
$x[n]y[n]$	$\frac{1}{2\pi} \int_{-\pi}^{\pi} X(e^{j\theta})Y(e^{j(\omega - \theta)}) d\theta$	Modulation

## Common Fourier transform pairs

Sequence	Fourier transform
$\delta[n]$	1
$\delta[n - n_0]$	$e^{-j\omega n_0}$
1 ( $-\infty < n < \infty$ )	$\sum_{k=-\infty}^{\infty} 2\pi\delta(\omega + 2\pi k)$
$a^n u[n]$ ( $ a  < 1$ )	$\frac{1}{1-ae^{-j\omega}}$
$u[n]$	$\frac{1}{1-ae^{-j\omega}} + \sum_{k=-\infty}^{\infty} \pi\delta(\omega + 2\pi k)$
$(n+1)a^n u[n]$ ( $ a  < 1$ )	$\frac{1}{(1-ae^{-j\omega})^2}$
$\frac{\sin(\omega_c n)}{\pi n}$	$X(e^{j\omega}) = \begin{cases} 1 &  \omega  < \omega_c \\ 0 & \omega_c <  \omega  \leq \pi \end{cases}$
$x[n] = \begin{cases} 1 & 0 \leq n \leq M \\ 0 & \text{otherwise} \end{cases}$	$\frac{\sin[\omega(M+1)/2]}{\sin(\omega/2)} e^{-j\omega M/2}$
$e^{j\omega_0 n}$	$\sum_{k=-\infty}^{\infty} 2\pi\delta(\omega - \omega_0 + 2\pi k)$

## Common z-transform pairs

Sequence	Transform	ROC
$\delta[n]$	1	All $z$
$u[n]$	$\frac{1}{1-z^{-1}}$	$ z  > 1$
$-u[-n-1]$	$\frac{1}{1-z^{-1}}$	$ z  < 1$
$\delta[n-m]$	$z^{-m}$	All $z$ except 0 or $\infty$
$a^n u[n]$	$\frac{1}{1-az^{-1}}$	$ z  >  a $
$-a^n u[-n-1]$	$\frac{1}{1-az^{-1}}$	$ z  <  a $
$n a^n u[n]$	$\frac{az^{-1}}{(1-az^{-1})^2}$	$ z  >  a $
$-n a^n u[-n-1]$	$\frac{az^{-1}}{(1-az^{-1})^2}$	$ z  <  a $
$\begin{cases} a^n & 0 \leq n \leq N-1, \\ 0 & \text{otherwise} \end{cases}$	$\frac{1-a^N z^{-N}}{1-az^{-1}}$	$ z  > 0$
$\cos(\omega_0 n)u[n]$	$\frac{1-\cos(\omega_0)z^{-1}}{1-2\cos(\omega_0)z^{-1}+z^{-2}}$	$ z  > 1$
$r^n \cos(\omega_0 n)u[n]$	$\frac{1-r\cos(\omega_0)z^{-1}}{1-2r\cos(\omega_0)z^{-1}+r^2 z^{-2}}$	$ z  > r$